



License Plate Recognition System LPR-3X





Ultra HD 2 million pixels (1080P)

Product Features

- All-day vehicle capture rate is higher than 99%;
- All-day license plate recognition rate is higher than 95%;
- Adopt video compression technology H.264 for video encoding, and capture frames using JPEG encoding;
- Support three detection methods: coil detection, video detection, coil detection + video detection ;
- Support OSD information overlay function, support video / picture overlay watermark;
- Support white list import and export function, can do fuzzy matching on white list;
- Support configuration file import backup;
- Support manual key reset, you can restore the initial IP address, user name, password and restore the default factory configuration with one click;

Dimensions

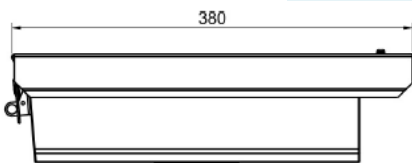

Software Interface

SUCP SUCP 2022-04-08 09:38:11 星期五 登入用戶: admin 八達通

系統及系統參數

系統參數	當前值	設定值
系統時間	2022-04-08 09:38:11	2022-04-08 09:38:11
系統用戶	admin	admin
系統密碼	123456	123456

車牌: SU1234 修改識別車牌

時租泊車付款及優惠

入開車牌: SU1234 出開車牌: SU1234

事件

日期	時間	車牌	泊車模式	卡號	卡類型	識別車牌	車輛類型	車位組	登記車牌	事件
2022-04-08	09:38:09	出開	時租	29402202	八達通	SU1234	私家車			等待時租車離開
2022-04-08	09:38:09	出開	時租	29402202	八達通	SU1234	私家車			時租泊車收費成功 \$1.0
2022-04-08	09:34:38	入開	時租	29402202	八達通	SU1234	私家車			時租泊車進入

入開 2022/04/08 09:38:11

SUCP
SUCP

歡迎光臨
Welcome

泊車付款

停留時間: 4 mins

Parking Time: 4 mins

收費: \$1.0

Parking Fee: \$1.0

八達通餘額: \$70.9

Remaining Value: \$70.9

如需收據, 請按鍵
Press Button to Print Receipt

出開 2022/04/08 09:38:10



Technical Data - License Plate Recognition System LPR-3X

Types of	Description	Parameter
Intelligent Recognition	Vehicle capture rate	≥99%
	License plate recognition rate	>95%
Video input	sensor type	2-million-pixel star-level CMOS
	Lens and focal length	Zoom 2.8-12mm
	Exposure time	1/100 ~ 1 / 10000s
Video output	Image size	1080P · 720P · 4CIF
	Compression standard	Video H.264 / Picture JPEG
	Compressed output bit rate	384Kbps ~ 4Mbps
	Highest frame rate	Main stream 25FPS, substream 25FPS
	Image settings	Adjustable shutter, gain, brightness, etc.
Business functions	Snapshot trigger type	Video, coil, video + coil
	Output information	Large picture of the vehicle, small image of the license plate, license plate number, license plate color
	OSD information overlay	Support, can define time, place, license plate, etc.
	One-click reset	Short press for 2 seconds to restore the default IP, username and password
	White list function	Long press for 10 seconds, restore the default IP, username and password, factory configuration
	Offline charges	Support white list import and export functions
	Voice intercom	Support offline charging function
External interface	The internet	1 RJ45 100M adaptive network interface
	communication	2 RS485 interfaces
	power supply	1 AC voltage interface (90V-270V)
	Enter	2 digital inputs / levels, 2 digital inputs
	Output	2-way switch output interface (relay)
	Reset	1 reset button interface
	USB	1 type A USB interface
	storage	1 TF card interface
	Voice key input	1 voice button input interface
	Voice input	1 voice input interface, support pickup input
working environment	Voice output	1 voice output interface, support 4 Euro 5W speaker output
	Total power	<7.5W
	Operating temperature	-30 ~ + 80 degrees
	Working humidity	5% ~ 95% (non-condensing)
Appearance	Protection class	IP65
	Size (mm)	260 × 141 × 108
	Weight (Kg)	1.85